

EXHIBITION FLOORING

FOR SALE
OR HIRE

RE-CONNECT

FASTER, SIMPLER, GREENER



An innovative clip&socket system
and lightweight design delivers...

RE-CONNECT at a glance...



Fast & easy

Decreases build-up and breakdown time compared to traditional solutions.



Lightweight & strong

High load-bearing capacity up to 20T/m² without visible deflection.



Flexible configurations

From compact stands to vehicle ready platforms.
(See overleaf)



Sustainable design

Made with 40% recycled PP and 100% recyclable.




6 year tile warranty


For complete peace of mind.



Advanced long term strong and secure connection of all tiles for fast and easy installation.

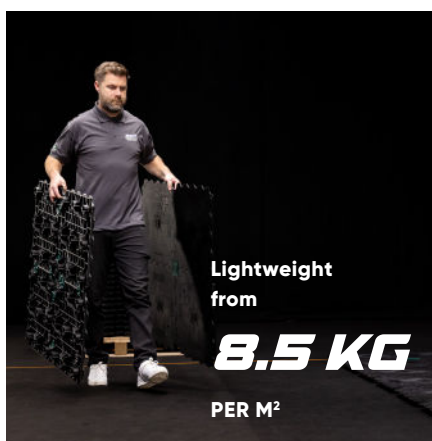


Lightweight from
8.5 KG
PER M²

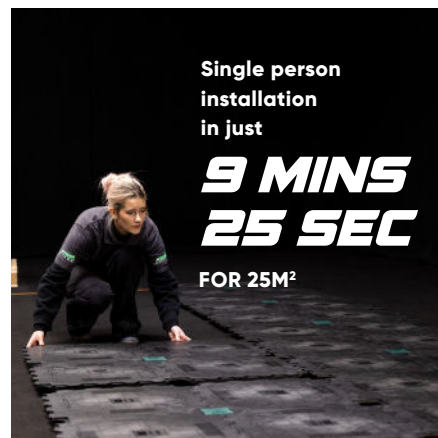

Single person installation in just

**9 MINS
25 SEC**

FOR 25M²

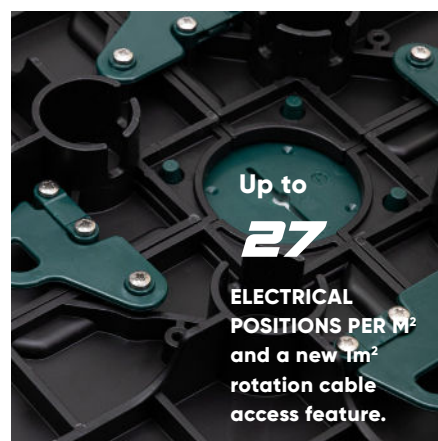

Up to
27

ELECTRICAL POSITIONS PER M²
and a new 1m² rotation cable access feature.




COME SAY HI

bematrix HQ
Wijnendalestraat 174
Roeselare - Belgium


+32 (0)51 20 07 50
www.bematrix.com

Cleverly designed sets and handy accessories

make any platform design easy to create thanks to the unique clip&socket system.



**RE-CONNECT
SET 1M²**



**RE-CONNECT SET
SLOPED EDGE 1M²**



**SLOPED
CORNER TILE**

1. DIMENSIONS & CLEARANCE HEIGHTS

Height and under floor clearance

Internal: 499.5mm x 499.5mm

External: 520mm x 520mm

Weight: 8.5kg per m²

All dimensions and figures are subject to manufacturer tolerances for size and weight.

43mm Re-Connect floor

25mm clearance for cables

100mm Re-Connect floor and all additional heights

54mm clearance for cables

2. LOAD CAPACITY

43mm Re-Connect floor

UDL = 20T/m²

Point loading = 2,5T*

* based on 200x200mm

100mm Re-Connect floor (with elevators)

UDL = 8T/m²

Point loading = 1T*

* based on 200x200mm

3. PLATFORM HEIGHTS

43mm, 100mm, 157mm, 214mm

Standard height: 43mm

With Elevator Accessory
(see picture below)



100
MM

157
MM

214
MM

